

PUMP OPERATED TOE JACKS

With advanced lifting and lowering functionality

Model

SLS40

Set Capacity: **40 Tons**



Four 10-ton jack with one 9 ft. hose & a hand pump

Hydraulic Toe Jack **EX10**




Lift Capacity (each jack)	10 tons 20,000 lbs
Number of adjustable toe starting positions	5
Toe height at lowest starting position	0.6"
Toe height at highest starting position	7.1"
Stroke (maximum lift from starting position)	5.9"
Toe depth (usable)	2.2"
External dimensions H x L x W	12.1 x 10.6 x 9.7"
Weight ready for use	64 lbs
Oil volume	10.1 fl.oz.
Manufacturer • MPN	JUNG • JH 10 Ex

Hose **H9**



Length	9 feet
Manufacturer • MPN	JUNG • JS 3

Functionality

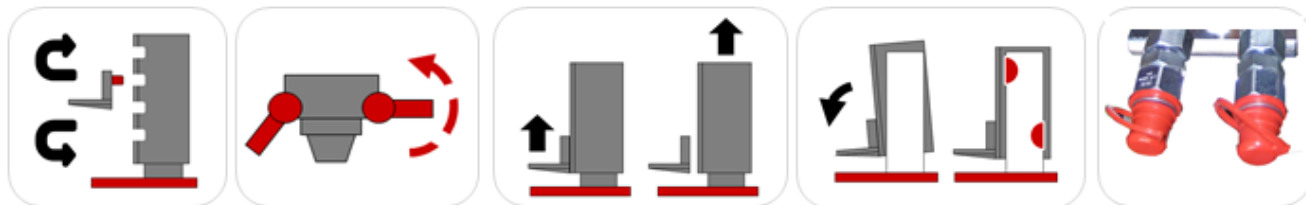

- ▶ Toe is adjustable to various starting positions.
- ▶ Swivel feet firmly support the jack to prevent tipping.
- ▶ Lift with toe or lift with top loading plate

- ▶ Patented slide shoe design counterbalances torque of forward leaning.
- ▶ Pumps outfitted with 2 connection nipples to operate or 2 jacks simultaneously.
- ▶ Hydraulic jacks and pumps operate at 7540 psi. (Do not use with 10,000 psi pumps)

WARNING!

For synchronous lifting of two jacks connected to one pump, each jack must carry equal weight. **Use one pump per jack if weight is not equally divided.**

Free lifetime rigging & technical support hotline!



MADE IN GERMANY

By JUNG



5 Year Manufacturer's Warranty*

* 1 Year Warranty on All Electrical Products

(damage due to overloading not covered)