

## CONTAINER DOLLIES

**OUTDOOR USE:** With large wheels and twist lock fittings for use on outdoor pavement

Load Capacity:


**30 tons** each -or-  
**60 tons** combined



**Model X30**  
Steerable



**Model Y30**  
Straight-line

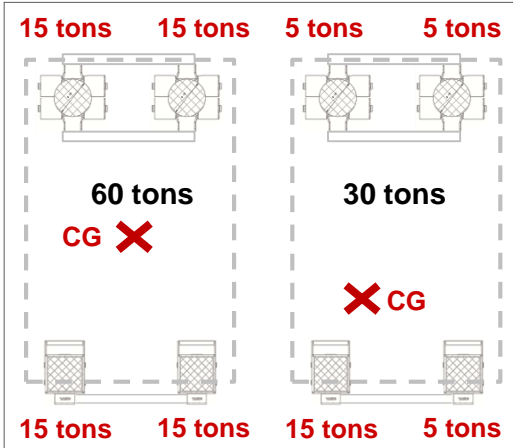

❗ \* Load capacity of 4-point dolly system is reduced when Center of Gravity (CG) location is not centered.

» Each Model Sold Separately «  
Mix & Match as Needed!

Included	One steerable 2-part dolly, connecting bars & pulling handle.	One straight-line 2-part dolly with non floor marking wheels and connecting bar.
Application range	Large wheels and twist lock fittings for indoor and <b>outdoor</b> pavement use. Fits any standard 8ft wide ISO container.	Large wheels and twist lock fittings for indoor and <b>outdoor</b> pavement use. Fits any standard 8ft wide ISO container.
Load Capacity each dolly model	<b>30 tons / 60,000 lbs</b>	<b>30 tons / 60,000 lbs</b>
Load Capacity combined X30 + Y30 ❗*	<b>60 tons / 120,000 lbs</b>	
Load capacity each load cassette (each loading point)	15 tons / 30,000 lbs	15 tons / 30,000 lbs
Distance between cone fittings	Fixed 89"	Adjustable to 89"
Overall Width x Length x Height (to top of twist lock)	29.1" x 49.5" x 11.8"	18" x 20.6" x 11.8"
Roller Diameter	5.5"	5.5"
Weight	642 lbs	278 lbs
Manufacturer • MPN	JUNG • JTLB 30 G + TL	JUNG • JFB 30 G + TL

Free lifetime rigging & technical support hotline!

**JUWathan+®  
Wheels**



with Aluminum Core

Patented wheel material is baked in oven over long period for elasticity & extreme toughness

- Non floor damaging
- Non floor marking



**ISO container fittings**

Dollies outfitted with twist lock container fittings. (Turn handle to lock tip into container)