

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

## BATTERY POWERED MACHINE SKATES WITH LIFT


with non floor damaging wheels

Load Capacity:

**15 tons each -or- 30 tons combined**



**Model EP15**  
with Option **EPopt15L**

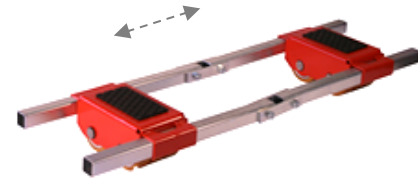

**Model B15**

Included	One battery powered steerable skate, remote control and battery charger.	One straight-line 2-part skate (not powered) and connecting bars.
Load Capacity Each	15 tons ▪ 30,000 lbs	15 tons ▪ 30,000 lbs
Load Capacity Combined <b>EP15 + B15</b>	30 tons ▪ 60,000 lbs	
Battery Powered Pulling Capacity	30 tons ▪ 60,000 lbs	none
Height Retracted   Lift (Stroke)   Height Extended	7.9"   2.0"   9.9"	7.1"   0   7.1"
Run Time under max Load (under ideal conditions)	4-5 hours	n/a
Maximum Speed at Full Load	33 feet per minute	n/a
Dimensions (width x length)	47.8" x 41.3"	18.1" x 8.1" each skate part without bar
Wheels: Total   Number for Propulsion   Size (Ø x width)	16   8   5.5" x 2.3"	12   0   5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 8.4"	8.6" x 4.7"
Length of Connecting Bar	n/a	60.6"
Weight (dolly   battery)	466   72 lbs	181 lbs   n/a
Manufacturer ▪ MPN	JUNG ▪ JLA-e 15/30 G w Stroke	JUNG ▪ JFB 15 G

### JUWathan® & JUWamid wheels



Non floor damaging  
Non floor marking

### Power

The skate runs on a rechargeable lithium-ion LiFePO4 battery. Charge time: 4-5 hours. The battery powers two 48V motors which propel the yellow JUWathan drive wheels. The black JUWamid wheels provide for load capacity.

### Included accessories with EP15:



**Skate battery charger**  
110V. 7.75 Amps.  
UL Recognized.



**Remote control (cordless)**  
Forward, reverse, stop,  
left/right (360°), speed.



**Remote control charger**  
110V. 50/60HZ; 250mA.