

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

BATTERY POWERED MACHINE SKATES WITH LIFT


with non floor damaging wheels

Load Capacity:

5 tons each -or- 10 tons combined



Model EP5
with Option **EPopt5L**

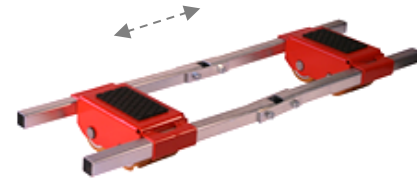

Model B15

Included	One battery powered steerable skate, remote control and battery charger.	One straight-line 2-part skate (not powered) and connecting bars.
Load Capacity Each	5 tons • 10,000 lbs	5 tons • 10,000 lbs
Load Capacity Combined EP5 + B15	10 tons • 20,000 lbs	
Battery Powered Pulling Capacity	10 tons • 20,000 lbs	none
Height Retracted Lift (Stroke) Height Extended	7.1" 2.0" 9.1"	7.1" 0 7.1"
Run Time under max Load (under ideal conditions)	4-5 hours	n/a
Maximum Speed at Full Load	33 feet per minute	n/a
Dimensions (width x length)	35.3 x 38.4"	18.1" x 8.1" each skate part without bar
Wheels: Total Number for Propulsion Size (Ø x width)	4 4 5.5" x 2.3"	12 0 5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 5.9"	8.6" x 4.7"
Length of Connecting Bar	n/a	60.6"
Weight (dolly battery)	353 72 lbs	181 lbs n/a
Manufacturer • MPN	JUNG • JLA-e 5/12 G w Stroke	JUNG • JFB 15 G

JUWathan® & JUWamid wheels



Non floor damaging
Non floor marking

Power

The skate runs on a rechargeable lithium-ion LiFePO4 battery. Charge time: 4-5 hours. The battery powers two 48V motors which propel the yellow JUWathan drive wheels. The black JUWamid wheels provide for load capacity.

Included accessories with EP5:



Skate battery charger
110V. 7.75 Amps.
UL Recognized.



Remote control (cordless)
Forward, reverse, stop,
left/right (360°), speed.



Remote control charger
110V. 50/60HZ; 250mA.