



TANDEM MACHINE SKATES

Advanced high-strength steel skates with non floor damaging wheels

Load Capacity:
**20 tons each -or-
40 tons combined**



Model T20
Steerable Adjustable-width

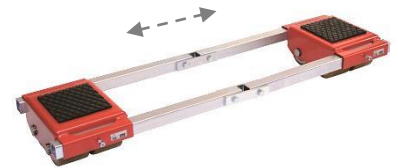

Model B20
Adjustable-Width Rear

» Each Model Sold Separately
Mix & Match as Needed! «

Included	One steerable 2-part skate with non floor marking wheels, connecting bars & pulling handle.	One straight-line 2-part skate with non floor marking wheels and connecting bar.
Load Capacity each skate model	20 tons / 40,000 lbs	20 tons / 40,000 lbs
Load Capacity combined T20 + U20 ①*	40 tons / 80,000 lbs	
Load Capacity each load cassette (each loading point)	10 tons / 20,000 lbs	10 tons / 20,000 lbs
Dimensions without bars (height x width x length)	7.1" x 17.1" x 39.9" each skate part	7.1" x 11" x 18" each skate part
Load Wheel Dimensions (Ø x width)	5.5" x 2.3"	5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 6.7"	8.6" x 7.8"
Adjustable Length of Connecting Bar	35.5" – 48.5"	60.7"
Weight	370 lbs	194 lbs
Manufacturer • MPN	JUNG • JTL 20 G	JUNG • JFB 20 G

Free lifetime rigging & technical support hotline!

**JUWathan+®
Wheels**



with Aluminum Core

Patented wheel material is baked in oven over long period for elasticity and extreme toughness!

Non floor damaging	For smooth and rough floors	Overcomes small obstacles easily by molding around them to keep rolling.	Low floor pressure	Shock absorbent	Superior performance and durability over traditional polyurethane, composite or steel wheels
Non floor marking	For floors with cracks and dirt	No stop, up & over action required like with other wheels.	Low break out & low rolling resistance	Reliable under toughest working conditions	
	For both inside and outside use		Low push-pull force and low manpower requirements		



MADE IN GERMANY
By JUNG



5 Year Manufacturer's Warranty
(damage due to overloading not covered)