


ⓘ* Load capacity of 4-point skate system is reduced when Center of Gravity (CG) location is not centered.

» Each Model Sold Separately Mix & Match as Needed! «


TANDEM MACHINE SKATES

Advanced high-strength steel skates with non floor damaging wheels

Load Capacity:
**30 tons each -or-
60 tons combined**

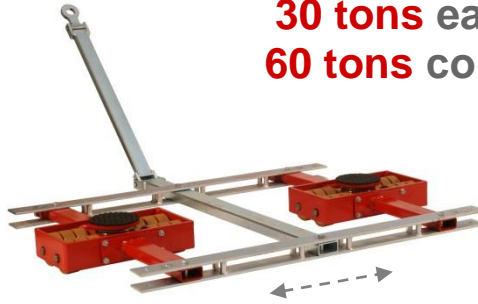

Model T30
Steerable Adjustable-width

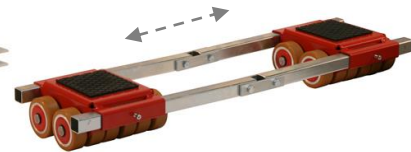

Model B30
Adjustable-Width Rear

Included	One steerable 2-part skate with non floor marking wheels, connecting bars & pulling handle.	One straight-line 2-part skate with non floor marking wheels and connecting bar.
Load Capacity each skate model	30 tons / 60,000 lbs	30 tons / 60,000 lbs
Load Capacity combined T30 + U30 ⓘ*	60 tons / 120,000 lbs	
Load capacity each load cassette (each loading point)	15 tons / 30,000 lbs	15 tons / 30,000 lbs
Dimensions without bars (height x width x length)	7.1" x 24.0" x 54.3" each skate part	7.1" x 18.1" x 15.7" each skate part
Load Wheel Dimensions (Ø x width)	5.5" x 2.3"	5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 8.5"	8.6" x 7.8"
Adjustable Length of Connecting Bar	50" – 63"	20.7" – 54.3"
Weight	624 lbs	249 lbs
Manufacturer • MPN	JUNG • JTLB 30 G	JUNG • JFB 30 G

Free lifetime rigging & technical support hotline!

**JUWathan+®
Wheels**



with Aluminum Core

Patented wheel material is baked in oven over long period for elasticity and extreme toughness!

Non floor damaging	For smooth and rough floors	Overcomes small obstacles easily by molding around them to keep rolling.	Low floor pressure	Shock absorbent	Superior performance and durability over traditional polyurethane, composite or steel wheels
Non floor marking	For floors with cracks and dirt	No stop, up & over action required like with other wheels.	Low break out & low rolling resistance	Reliable under toughest working conditions	
	For both inside and outside use		Low push-pull force and low manpower requirements		



MADE IN GERMANY
By JUNG



5 Year Manufacturer's Warranty
(damage due to overloading not covered)