

## CONFINED SPACE TOE JACKS

For use with an external pump

### Model C5 Set 1

### Model C5 Set 2



Set Capacity: **5 Tons**

Set Capacity: **10 Tons**

One 5 ton jack with one 6 ft. hose & a hand pump

Two 5 ton jacks with two 6 ft. hoses & a hand pump

### Upgrade Option

**C5 Set 1E and C5 Set 2E**

Replace hand pump with 110V electric pump



### Hydraulic Toe Jack C5

Lift Capacity each jack	<b>5 tons</b> 10,000 lbs
Toe height	<b>0.5"</b>
Maximum lift (stroke)	<b>9.7"</b>
Toe width (narrow tip) x depth	1.8 x 1.6"
Dimensions H x L x W, feet in <b>front</b>	13.8 x 6.7 x 5.7"
Dimensions H x L x W, feet in <b>back</b>	13.8 x 8.4 x 5.7"
Diameter top cylinder	2.2"
Oil volume	7.5 fl.oz.
Weight ready for use	24
Manufacturer • MPN	JUNG • JHS 5

### Hand Pump P26



Flow rate per pump (loaded)	0.08 fl.oz./pump
Oil volume	67.6 fl.oz.
Dimensions L x W x H	30.3 x 6.7x 6.6"
Weight ready for use	29 lbs
Manufacturer • MPN	JUNG • JP 26

### 1/4 HP Electric Pump P5




Flow rate per minute (loaded)	3.4 fl.oz. / min
Oil volume	33.8 fl.oz.
Dimensions L x W x H	13 x 7.8 x 8"
Weight ready for use	20 lbs
Manufacturer • MPN	JUNG • JPE 5

### Hose H6



Length	6 feet
Manufacturer • MPN	JUNG • JS 2

### Functionality

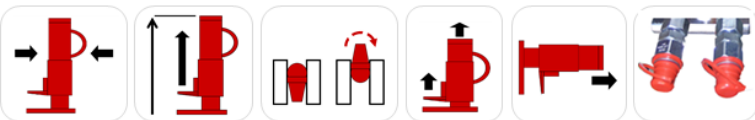

- ▶ Tall with long stroke, Narrow, Low profile toe
- ▶ Use with feet in front or feet rotated to back
- ▶ Lift with toe or head
- ▶ Use vertically for lifting and horizontally for pushing
- ▶ Pumps outfitted with 2 drip free quick connection nipples to operate 1 or 2 jacks simultaneously.
- ▶ Hydraulic jacks and pumps operate at 7540 psi. (Do not use with 10,000 psi pumps)

### WARNING!

For synchronous lifting of two jacks connected to one pump, each jack must carry equal weight. **Use one pump per jack if weight is not equally divided.**

Free lifetime rigging & technical support hotline!



**MADE IN GERMANY**

By JUNG



**5 Year Manufacturer's Warranty\***

\* 1 Year Warranty on All Electrical Products

(damage due to overloading not covered)