


How to move loads


Machine Skates

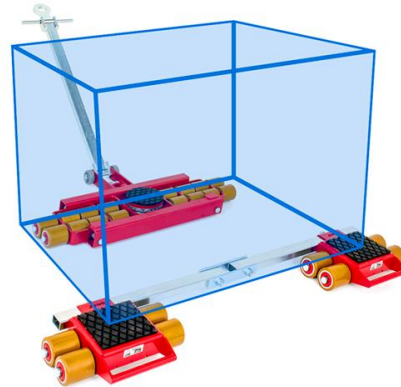


Made in Germany

© Toolwell, Inc. - all rights reserved -


Distributed by
Toolwell
North America

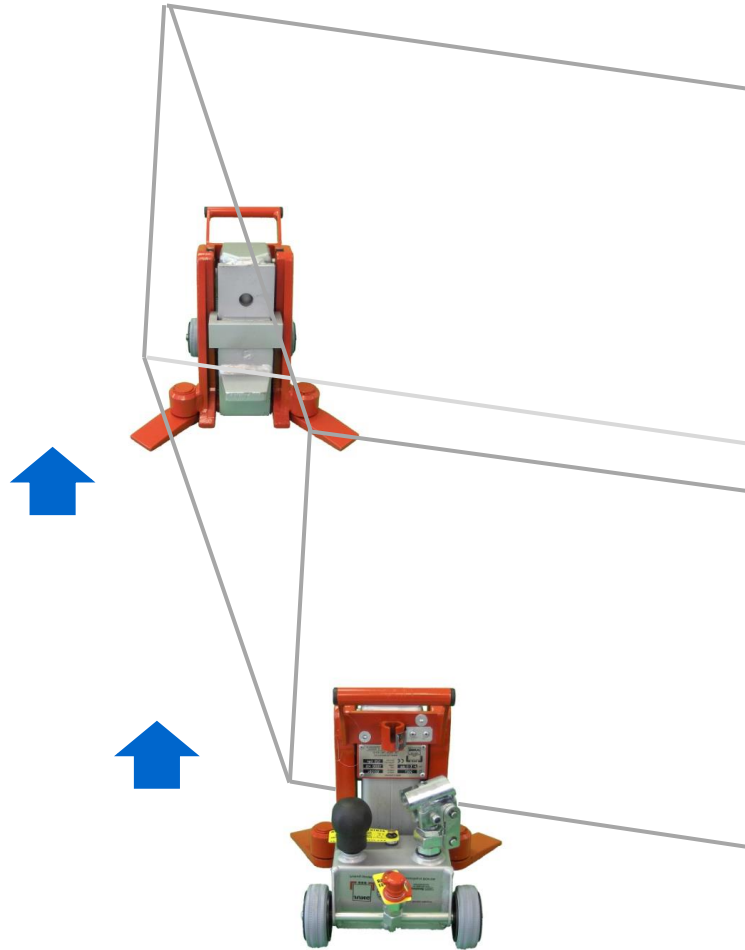


Step 1: Lift the back-end of the load first. You can use one or two jacks simultaneously.

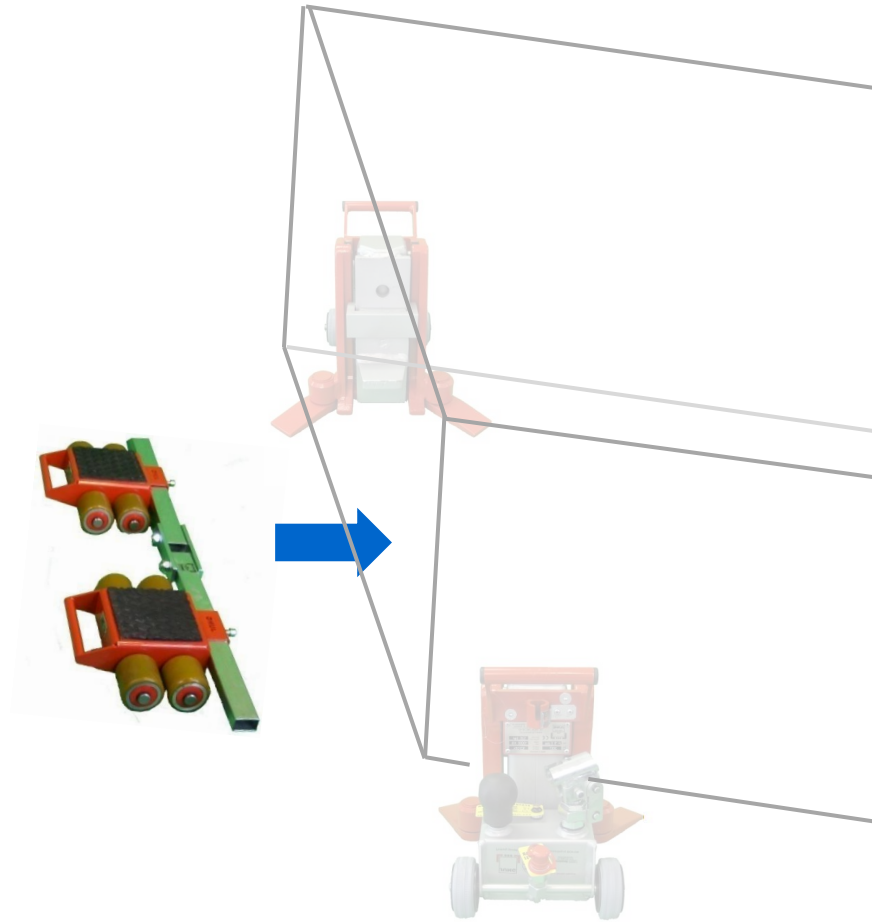


Step 2: Slide the rear skates underneath the load, then lower the load onto the skates.

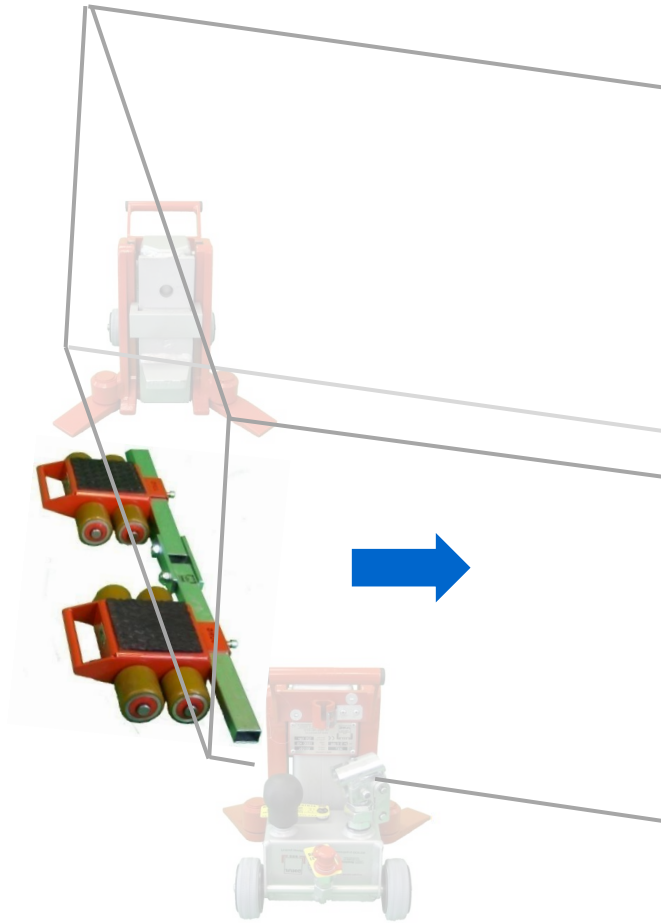

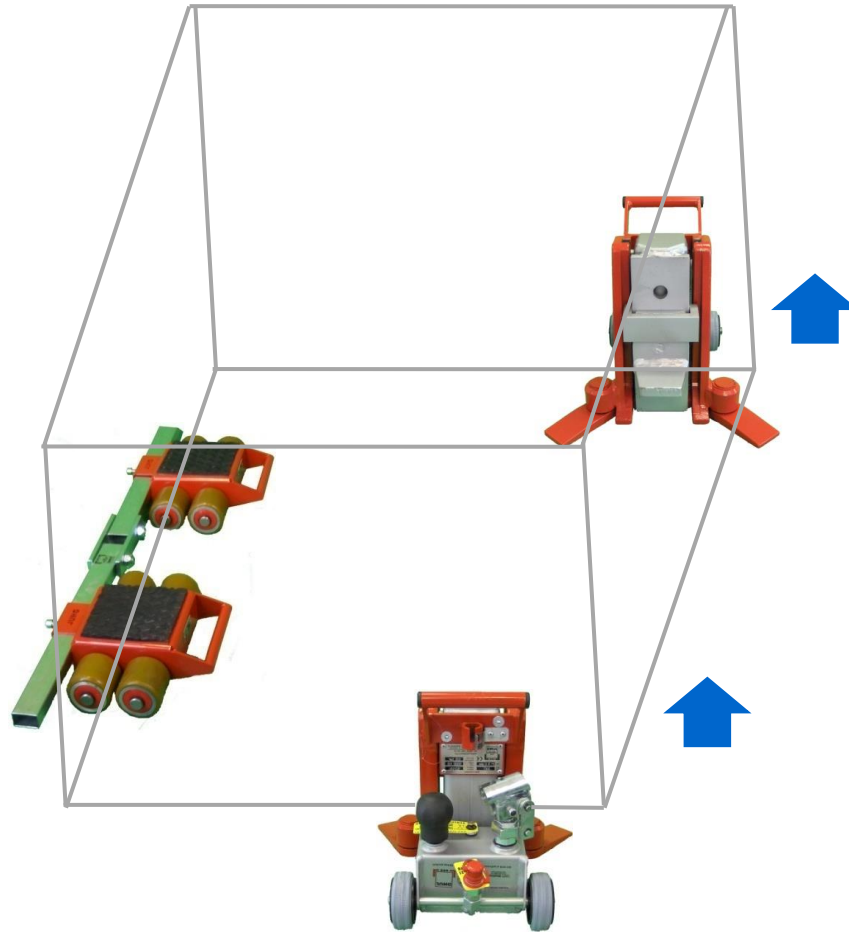

Step 3: Now lift the other end of the load.

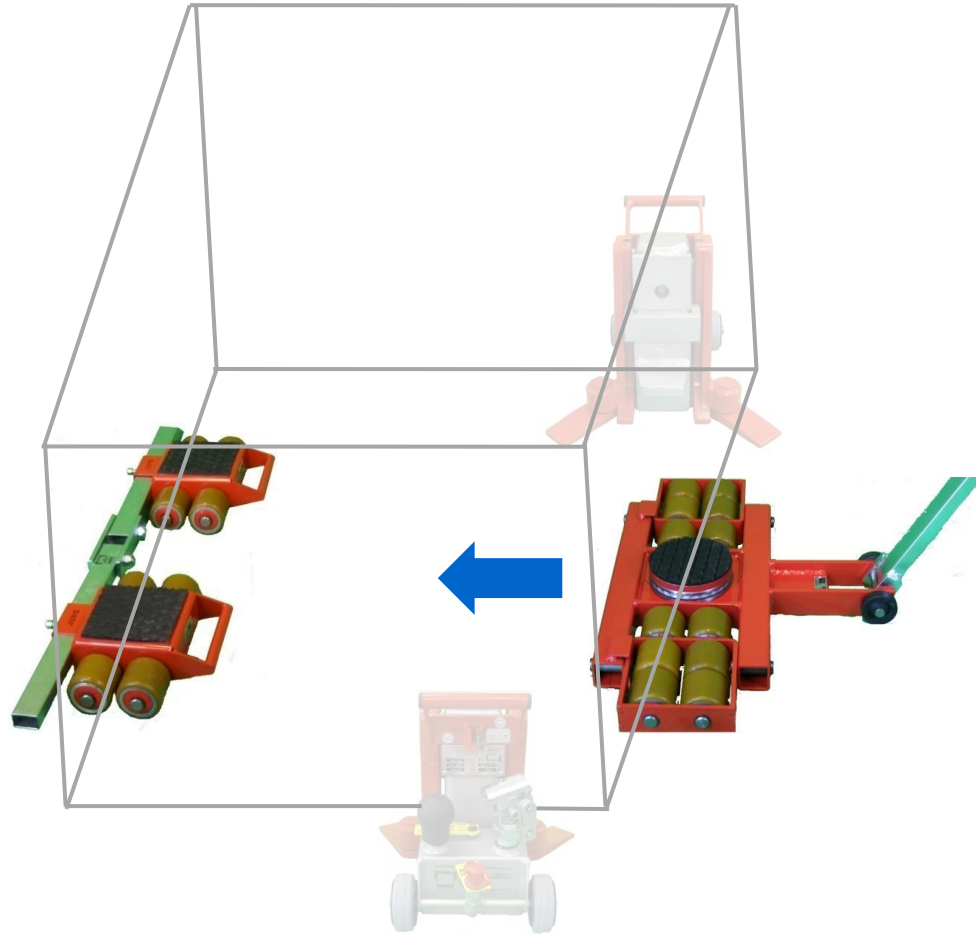

Step 4: Slide the single skate underneath.




Lower the load onto the skate.



Step 5: Now push the load. The pulling handle can also be hooked to a forklift for towing.



If you have just one jack, lift the load directly next to the single front skate.

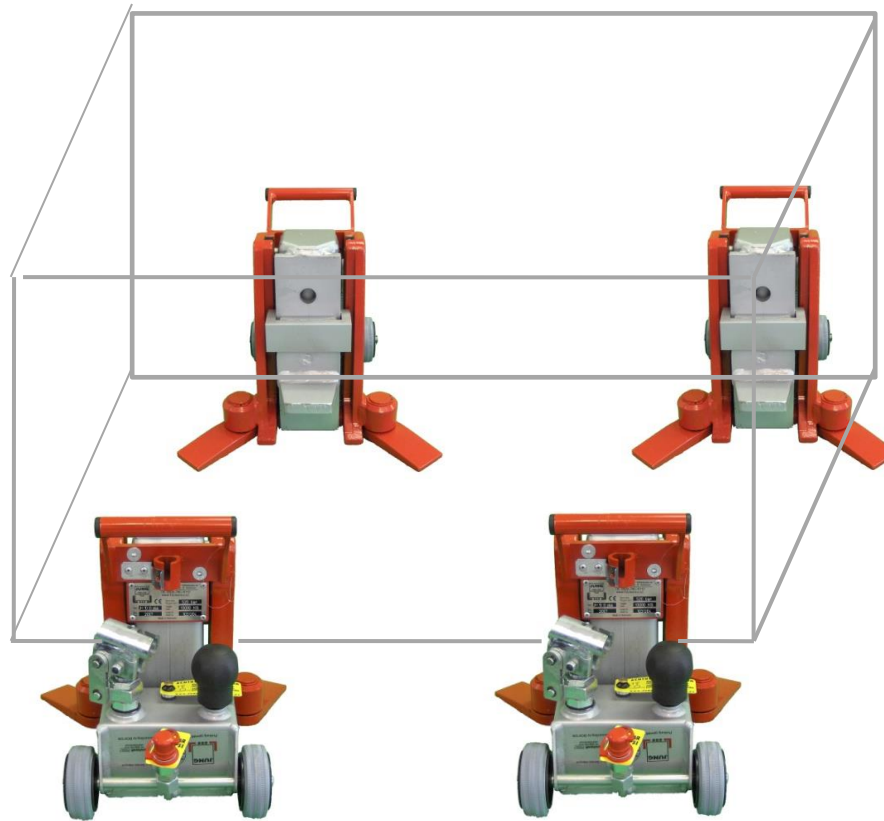

You can also use 4 jacks simultaneously to lift all four corners so you can position all skates at the same time.



Made in Germany

Toolwell

Distributed by

**Toolwell
North America**

© Toolwell, Inc. - all rights reserved

-