


Skate:  
**EP25/B40**

## WEIGHT DISTRIBUTION ON FLOOR

For machine skate models EP25 (JLA-e 25/50H) and B40 (JFB 40H)

### Wheel Footprint



#### Wheel contact surface with floor

- A •▶ width: 1.97" | 50mm
- A •▶ length: 3.35" | 85mm
- B •▶ width: 0.45" | 11mm
- B •▶ length: 3.35" | 85mm

#### Footprint per wheel:

- A •▶ **6.60 in<sup>2</sup>** | 42.5cm<sup>2</sup>
- B •▶ **1.50 in<sup>2</sup>** | 9.35cm<sup>2</sup>


#### Variations in Footprint:

The yellow JUWathan wheel is elastic and spreads out under weight. This gives the wheel a larger footprint for traction. The black JUWAmid wheel is harder to help carry the weight and provide improved turning characteristics. Ⓢ The footprint above is measured at maximum load capacity. The size of the actual footprint and in turn the actual psi may vary based on actual load weight, temperature, load bearing duration, etc.. Therefore the data provided is an estimate to be used as a general guideline only.

### Skate Footprint

Skate Model

**EP25**

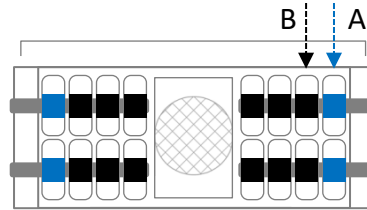

Footprint per skate: •▶ **44.4 in<sup>2</sup>**

Skate Model


**B40**



Footprint per skate: •▶ **79.20 in<sup>2</sup>**

### Footprint per ft<sup>2</sup>

Maximum footprint within any 1 ft<sup>2</sup> area



1 ft<sup>2</sup>  
area

Footprint per ft<sup>2</sup>:

•▶ **47.28 in<sup>2</sup>**

### Pressure per in<sup>2</sup> for concerns about indenting soft floor

$$\text{Pressure (psi)} = \frac{\text{Load weight (lbs) per skate}}{\text{Footprint (in<sup>2</sup>) per skate}}$$

Max pressure per in<sup>2</sup> at maximum load capacity •▶ **1126 psi**

### Pressure per ft<sup>2</sup> for concerns about breaking through supported floor

$$\text{Pressure (psf)} = \frac{\text{Load weight (lbs) per skate} \times \text{Footprint (in<sup>2</sup>) per ft<sup>2</sup>}}{\text{Footprint (in<sup>2</sup>) per skate}}$$

Pressure per one ft<sup>2</sup> at maximum capacity •▶ **18,750 psf**



MADE IN GERMANY • By JUNG