Toolwell[™]

Tel: (800) 786-6112

Fax: (866) 332-3299

www.Toolwell.com


Email: info@toolwell.com



WEIGHT DISTRIBUTION ON FLOOR

For tandem machine skate models T12 (JTLB 14K) and B12 (JFB 12K)

Wheel Footprint



Wheel size F •► length: 3.3" | 85mm H •► length: 1.6" | 42mm F&H •► diameter: 3.3" | 85mm

Wheel contact surface with floor


F • I> width: 0.79" 20mm
F •▶ length: 3.35" 85mm
H •▶ width: 0.79" 20mm
H •▶ length: 1.67" 40mm

Footprint per wheel: F•▶ 2.65 in² | 17.0cm²

H•▶ 1.32 in² | 8.0cm²

Variations in Footprint:

With increasing weight, the elastic JUWAthan wheel material spreads out and increases the contact area with the floor. The enlarged footprint divides the weight over a larger area so that the pressure onto the floor is drastically reduced. The footprint above is measured at maximum load capacity. (1) The size of the actual footprint and in turn the actual psi may vary based on actual load weight, temperature, load bearing duration, etc.. Therefore the data provided is an estimate to be used as a general guideline only.

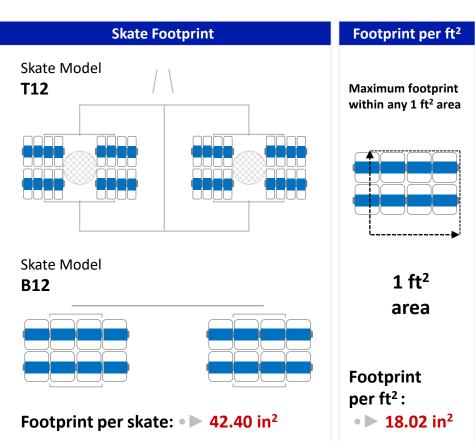

Pressure per in² for concerns about indenting soft floor

Pressure (psi) = Footprint (in²) per skate

Pressure per in² at maximum load capacity • > 623 psi

Pressure per ft² for concerns about breaking through supported floor

Load weight (lbs) per skate x Footprint (in²) per ft²

Pressure (psf) = -

Footprint (in²) per skate

Pressure per one ft² at maximum capacity • > 11,262 psf

MADE IN GERMANY • By JUNG