


COMPACT MACHINE DOLLY

with floor-protective polyurethane wheels

Set Capacity:

12 tons (3 tons each dolly)

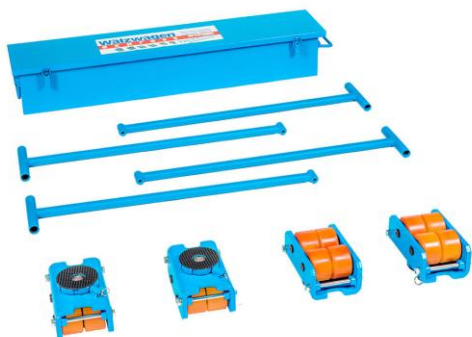

Model **KF3KIT4**

Included	Four (4) dollies, four (4) turning handles, one (1) box
Set Capacity	12 tons / 26,500 lbs
Capacity per each dolly	3 tons / 6,600 lbs
Dolly Height	4.6"
Dolly Dimensions (Width x Length)	5.8" x 8.7" without handle
Load Wheel Dimensions (Ø x Width)	3.1" x 2.0"
Supporting Surface (each with anti-slip load pad)	Ø 4.3"
Number of Wheels per Dolly	4
Weight of Set Weight per Dolly	115 lbs 22 lbs
Manufacturer • MPN	Boerkey • KF3SET4



Ideal for straight-line and sideways movement of loads. Not freely steerable.
Instead: Roll in set direction, Stop, Turn dolly, Roll in new direction.



Advantage

- ▶ Small, compact and portable.
Ideal for toolbox.

Use

- ▶ Easy repositioning of loads
- ▶ Locking swivel top for easier long-distance travel

Features:

- ▶ Locking swivel top
- ▶ Protective load pad
- ▶ Floor protective wheels

Roller Construction:

- ▶ Robust carbon steel frame construction
- ▶ Poly wheels with ball bearings
- ▶ Turnplate with thrust bearing

Applications:

Used in ship building, steel and mining, machine fabrication, steel erecting, general construction, rigging, and in heavy industry. Often used on construction sites. For transporting equipment and other loads on steel frames.

ⓘ When using 4 or more rollers, load may rock on uneven surface, increasing load weight applied to any dolly. Therefore, select double the rated dolly capacity.

Corrosion Resistance:

Outfitted with zinc-phosphate coated frame for basic corrosion resistance.

Precautionary measures must be taken for use on inclines to avoid run-away loads!

When using dollies to support one end of load and a forklift to support the other end, keep the load at same loading height. Otherwise, dollies will tip and become point-loaded.