


CONTAINER DOLLIES

OUTDOOR USE: With large wheels and twist lock fittings for use on outdoor pavement


Load Capacity:
**20 tons each -or-
40 tons combined**

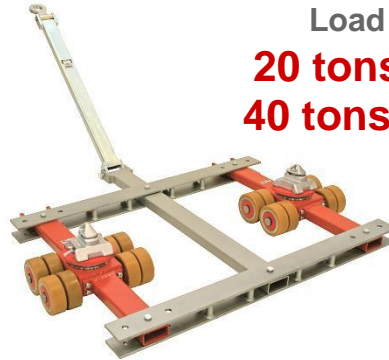

Model X20
Steerable



Model Y20
Straight-line

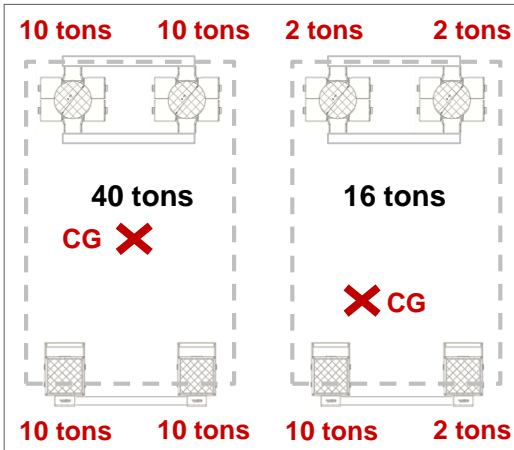

ⓘ* Load capacity of 4-point dolly system is reduced when Center of Gravity (CG) location is not centered.

» Each Model Sold Separately Mix & Match as Needed! «

Included	One steerable 2-part dolly, connecting bars & pulling handle.	One straight-line 2-part dolly with non floor marking wheels and connecting bar.
Application range	Large wheels and twist lock fittings for indoor and outdoor pavement use. Fits any standard 8ft wide ISO container.	Large wheels and twist lock fittings for indoor and outdoor pavement use. Fits any standard 8ft wide ISO container.
Load Capacity each dolly model	20 tons / 40,000 lbs	20 tons / 40,000 lbs
Load Capacity combined X20 + Y20 ⓘ*	40 tons / 80,000 lbs	
Load capacity each load cassette (each loading point)	10 tons / 20,000 lbs	10 tons / 20,000 lbs
Distance between cone fittings	Fixed 89"	Adjustable to 89"
Overall Width x Length x Height (to top of twist lock)	18.0" x 40.0" x 11.8"	11" x 18" x 11.8"
Roller Diameter	5.5" x 2.3"	5.5" x 2.3"
Weight	390 lbs	205 lbs
Manufacturer • MPN	JUNG • JTL 20 G + TL	JUNG • JFB 20 G + TL

Free lifetime rigging & technical support hotline!

**JUWathan+®
Wheels**



with Aluminum Core

Patented wheel material is baked in oven over long period for elasticity & extreme toughness

- Non floor damaging
- Non floor marking



ISO container fittings

Dollies outfitted with twist lock container fittings. (Turn handle to lock tip into container)

