


## BATTERY POWERED MACHINE SKATES

with non floor damaging wheels

Load Capacity:


**15 tons each -or-  
30 tons combined**

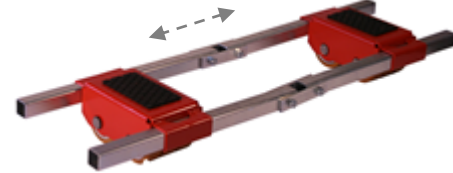

**Model EP15**  
Powered Steerable Front

**Model B15**  
Adjustable-Width Rear

### Example of Load Distribution

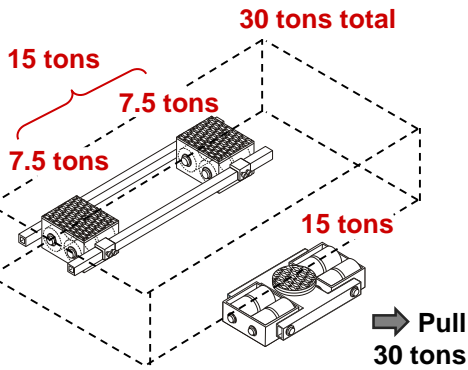

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

Included	One battery powered steerable skate, remote control and battery charger.	One straight-line 2-part skate (not powered) and connecting bars.
Load Capacity Each	15 tons • 30,000 lbs	15 tons • 30,000 lbs
Load Capacity Combined <b>EP15 + B15</b>	30 tons • 60,000 lbs	
Battery Powered Pulling Capacity	30 tons • 60,000 lbs	none
Height (from floor to top of load pad)	7.1"	7.1"
Run Time under max Load (under ideal conditions)	5-6 hours	n/a
Maximum Speed at Full Load	21 feet per minute	n/a
Dimensions (width x length)	47.2" x 31.5"	18.1" x 8.1" each skate part without bar
Load Wheel Dimensions (Ø x width)	5.5" x 2.3"	5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 8.5"	8.6" x 4.7"
Length of Connecting Bar	n/a	60.6"
Weight (dolly   battery)	485   194 lbs	181 lbs   n/a
Manufacturer • MPN	JUNG • JLA-e 15/30 G	JUNG • JFB 15 G

### JUWathan® & JUWamid wheels



Non floor damaging  
Non floor marking

### Run Time

The skate and the remote control run on rechargeable batteries. Charge time: 1.5 hours. With a full charge the skate and the remote will run under continuous use & with a full load for 5-6 hours. (Under ideal conditions meaning smooth floors etc.)

### Included accessories with EP15:



**Skate battery charger**  
110V. 7.75 Amps.



**Remote control (cordless)**  
Forward, reverse, stop, left/right (360°), speed.



**Remote control charger**  
110V. 50/60HZ; 250mA.

