


## BATTERY POWERED MACHINE SKATES

with non floor damaging wheels


Load Capacity:

**25 tons each -or-  
50 tons combined**

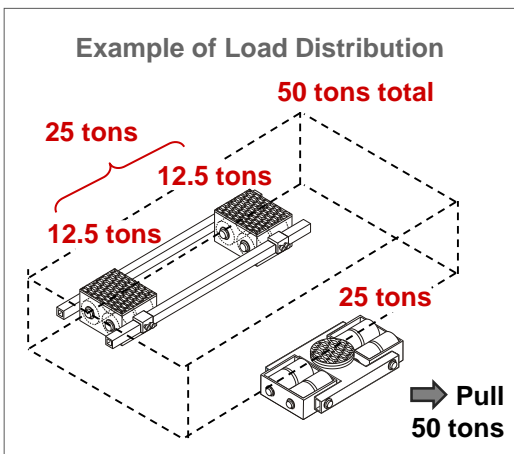

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately  
Mix & Match as Needed! «

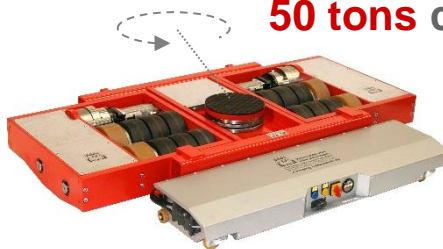

**Model EP25**  
Powered Steerable Front



**Model B40**  
Adjustable-Width Rear

Included	One battery powered steerable skate, remote control and battery charger.	One straight-line 2-part skate (not powered) and connecting bars.
Load Capacity Each	<b>25 tons • 50,000 lbs</b>	<b>25 tons • 50,000 lbs</b> (40 tons actual)*
Load Capacity Combined <b>EP25 + B40</b>	<b>50 tons • 100,000 lbs</b>	
Battery Powered Pulling Capacity	<b>50 tons • 100,000 lbs</b>	<b>none</b>
Height (from floor to top of load pad)	9.1"	9.1"
Run Time under max Load (under ideal conditions)	3-4 hours	n/a
Maximum Speed at Full Load	30 feet per minute	n/a
Dimensions (width x length)	69.3" x 46.5"	29" x 16" each skate part without bar
Load Wheel Dimensions (Ø x width)	7.9" x 3.3"	7.9" x 6.7"
Supporting Surface (each with anti-slip load pad)	Ø 9.8"	16" x 10"
Length of Connecting Bar	n/a	60.7"
Weight (dolly   battery)	1301   194 lbs	637 lbs   n/a
Manufacturer • MPN	JUNG • JLA-e 25/50 H	JUNG • JFB 40 H

JUWathan® & JUWamid wheels



Non floor damaging  
Non floor marking

### Run Time

The skate and the remote control run on rechargeable batteries. Charge time: 1.5 hours. With a full charge the skate and the remote will run under continuous use & with a full load for 3-4 hours. (Under ideal conditions meaning smooth floors etc.)

Included accessories with EP25:



**Skate battery charger**  
110V. 7.75 Amps.



**Remote control (cordless)**  
Forward, reverse, stop, left/right (360°), speed.



**Remote control charger**  
110V. 50/60HZ; 250mA.

\*The B40 has a rated capacity of 40 tons, however, it is designed to carry 25 tons with this set.

