


MACHINE SKATES

Advanced high-strength steel skates with non floor damaging wheels


Load Capacity:
**20 tons each -or-
40 tons combined**



Model A20
Steerable Front

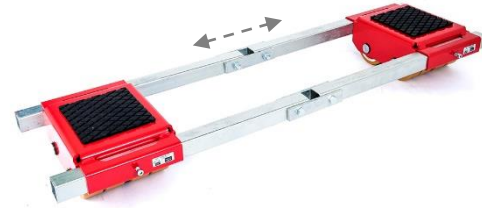

Model B20
Adjustable-Width Rear

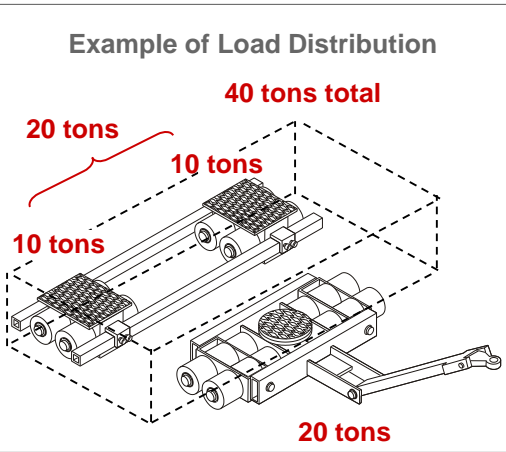

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

Included	One steerable skate with non floor marking wheels and pulling handle.	One straight-line 2-part skate with non floor marking wheels and connecting bar.
Load Capacity Each	20 tons • 40,000 lbs	20 tons • 40,000 lbs
Load Capacity Combined A20 + B20	40 tons • 80,000 lbs	
Height (from floor to top of load pad)	7.1"	7.1"
Dimensions (Width x Length)	29.2" x 22.2" without handle	18.1" x 11.2" each skate part without bar
Load Wheel Dimensions (Ø x Width)	5.5" x 2.3"	5.5" x 2.3"
Supporting Surface (each with anti-slip load pad)	Ø 8.5"	8.7" x 7.9"
Length of Connecting Bar	n/a	60"
Pulling Handle length (with towing eye)	57"	n/a
Weight	212 lbs	194 lbs
Manufacturer • MPN	JUNG • JLB 20 G	JUNG • JFB 20 G

Free lifetime rigging & technical support hotline!

JUWathan+® Wheel



with Aluminum Core

Patented wheel material is baked in oven over long period for elasticity and extreme toughness!

Non floor damaging	For smooth and rough floors	Overcomes small obstacles easily by molding around them to keep rolling.	Low floor pressure	Shock absorbent	Superior performance and durability over traditional polyurethane, composite or steel wheels
Non floor marking	For floors with cracks and dirt	No stop, up & over action required like with other wheels.	Low break out & low rolling resistance	Reliable under toughest working conditions	
	For both inside and outside use		Low push-pull force and low manpower requirements		