Toolwell™
Tel: (800) 786-6112
Fax: (866) 332-3299
www.Toolwell.com
Email: info@toolwell.com

MACHINE SKATES

Advanced high-strength steel skate
with non floor damaging wheels

Load Capacity:
60 tons each -or-
120 tons combined

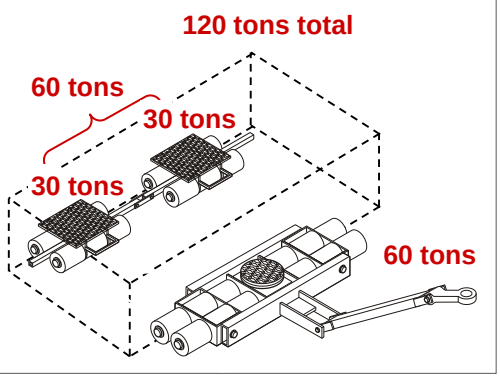

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

Model A60
Steerable Front

Model B60
Adjustable-Width Rear

Included	One steerable skate with non floor marking wheels and pulling handle.	One straight-line 2-part skate with non floor marking wheels and connecting bar.
Load Capacity Each	**60 tons ▪ 120,000 lbs**	**60 tons ▪ 120,000 lbs**
Load Capacity Combined A60 + B60	**120 tons ▪ 240,000 lbs**	
Height (from floor to top of load pad)	9.1”	9.1”
Dimensions (Width x Length)	55” x 26” without handle	22” x 29” each skate part without bars
Load Wheel Dimensions (Ø x Width)	7.9” x 6.7” and 7.9” x 3.3”	7.9” x 6.7” and 7.9” x 3.3”
Supporting Surface (each with anti-slip load pad)	Ø 9.8”	15.6” x 10”
Length of Connecting Bar	n/a	60.7”
Pulling Handle length (with towing eye)	62.6”	n/a
Weight	992 lbs	904 lbs
Manufacturer ▪ MPN	JUNG ▪ JLB 60 H	JUNG ▪ JFB 60 H

Free lifetime rigging & technical support hotline!

JUWAthan+® Wheels



with Steel Core

Patented wheel material is baked in oven over long period for elasticity and extreme toughness!

Non floor damaging
Non floor marking

For smooth and rough floors
For floors with cracks and dirt
For both inside and outside use

Overcomes small obstacles easily by molding around them to keep rolling.
No stop, up & over action required like with other wheels.

Low floor pressure
Low break out & low rolling resistance
Low push-pull force and low manpower requirements

Shock absorbent
Reliable under toughest working conditions

Superior performance and durability over traditional polyurethane, composite or steel wheels

MADE IN GERMANY
By **JUNG**

5 Year Manufacturer’s Warranty
(damage due to overloading not covered)