


TWIN CYLINDER TOE JACK

For use with external pump

Hydraulic • Super high capacity • Mobile

Usable toe
on front and back

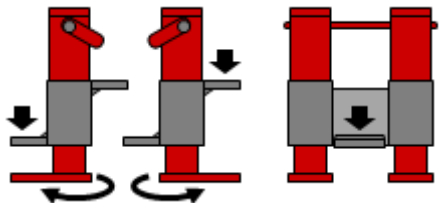

- Operate jack from a distance with external pump.
- High capacity at low weight.
- 2 Lifting toes (front & back).
- 180° Rotating feet for lifting with or without feet to fit available clearance.
- Single acting load return (Retract jack with push back cart, see below).
- Swiveling drip free hose connector.



Model

C50 twin

Load Capacity: **50 Tons**

Lift Capacity	50 tons 100,000 lbs
Toe height (bottom toe)	1.4"
Toe height (2nd toe)	10.8"
Stroke	9.8"
Toe width (narrow end) / Toe depth	3.9" / 3.3"
Working pressure (metric !)	7540 psi / 520 bar
External dimensions H x L x W (feet in front)	21.2 x 13.9 x 15.0"
Cylinder oil volume	0.66 Gallons
Weight	232 lbs
Manufacturer • MPN	JUNG • JH 50 P

WARNING! DO NOT USE with common 10,000 psi pumps! Use with hydraulic pumps operating at 7540 psi only!



Free lifetime rigging & technical support hotline!



Required accessory:
Push back cart for retracting & transporting jack.

- ▶ Use with electric pump or air-over-hydraulic pump
- ▶ **Pump and hoses sold separately.**



MADE IN GERMANY

By JUNG



5 Year Manufacturer's Warranty

(damage due to overloading not covered)