

CONFINED SPACE TOE JACKS

For use with an external pump

Model C5 Set 1

Model C5 Set 2



Set Capacity: **5 Tons**

Set Capacity: **10 Tons**

One 5 ton jack with one 6 ft. hose & a hand pump

Two 5 ton jacks with two 6 ft. hoses & a hand pump



Upgrade Option "E"

Replace hand pump with ¼ HP electric pump 110V



Hydraulic Toe Jack C5

Lift Capacity each jack	5 tons 10,000 lbs
Toe height	0.5"
Maximum lift (stroke)	9.7"
Toe width (narrow tip) x depth	1.8 x 1.6"
Dimensions H x L x W, feet in front	13.8 x 6.7 x 5.7"
Dimensions H x L x W, feet in back	13.8 x 8.4 x 5.7"
Diameter top cylinder	2.2"
Oil volume	7.5 fl.oz.
Weight ready for use	24
Manufacturer • MPN	JUNG • JHS 5

Hand Pump P26



Flow rate per pump (loaded)	0.08 fl.oz./pump
Oil volume	67.6 fl.oz.
Dimensions L x W x H	30.3 x 6.7x 6.6"
Weight ready for use	29 lbs
Manufacturer • MPN	JUNG • JP 26

1/4 HP Electric Pump P5




Flow rate per minute (loaded)	3.4 fl.oz. / min
Oil volume	33.8 fl.oz.
Dimensions L x W x H	13 x 7.8 x 8"
Weight ready for use	20 lbs
Manufacturer • MPN	JUNG • JPA 5

Hose H6



Length	6 feet
Manufacturer • MPN	JUNG • JS 2

Functionality

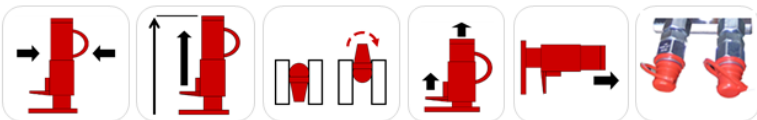

- ▶ Tall with long stroke, Narrow, Low profile toe
- ▶ Use with feet in front or feet rotated to back
- ▶ Lift with toe or head
- ▶ Use vertically for lifting and horizontally for pushing
- ▶ Pumps outfitted with 2 drip free quick connection nipples to operate 1 or 2 jacks simultaneously.
- ▶ Hydraulic jacks and pumps operate at 7540 psi. (Do not use with 10,000 psi pumps)

WARNING!

For synchronous lifting of two jacks connected to one pump, each jack must carry equal weight. **Use one pump per jack if weight is not equally divided.**

Free lifetime rigging & technical support hotline!



MADE IN GERMANY

By JUNG



5 Year Manufacturer's Warranty*

* 1 Year Warranty on All Electrical Products
(damage due to overloading not covered)