Toolwell™
Tel: (800) 786-6112
Fax: (866) 332-3299
www.Toolwell.com
Email: info@toolwell.com

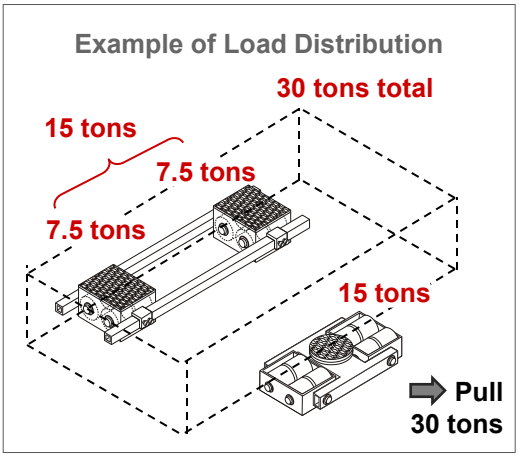

3-point skate systems do not slip during pulling & tugging actions

» Each Model Sold Separately Mix & Match as Needed! «

BATTERY POWERED MACHINE SKATES

with non floor damaging wheels

Load Capacity:

15 tons each -or- 30 tons combined

Model EP15

Powered Steerable Front

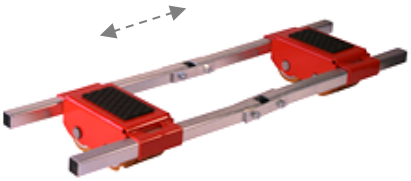

Model B15

Adjustable-Width Rear

Included	One battery powered steerable skate, remote control and battery charger.	One straight-line 2-part skate (not powered) and connecting bars.
Load Capacity Each	**15 tons ▪ 30,000 lbs**	**15 tons ▪ 30,000 lbs**
Load Capacity Combined EP15 + B15	**30 tons ▪ 60,000 lbs**	
Battery Powered Pulling Capacity	**30 tons ▪ 60,000 lbs**	**none**
Height (from floor to top of load pad)	7.1”	7.1”
Run Time under max Load (under ideal conditions)	4-5 hours	n/a
Maximum Speed at Full Load	21 feet per minute	n/a
Dimensions (width x length)	47.8” x 32.9”	18.1” x 8.1” each skate part without bar
Wheels: Total | Number for Propulsion | Size (Ø x width)	16 | 8 | 5.5” x 2.3”	12 | 0 | 5.5” x 2.3”
Supporting Surface (each with anti-slip load pad)	Ø 9.8”	8.6” x 4.7”
Length of Connecting Bar	n/a	60.6”
Weight (dolly | battery)	436 | 72 lbs	181 lbs | n/a
Manufacturer ▪ MPN	JUNG ▪ JLA-e 15/30 G	JUNG ▪ JFB 15 G

JUWAthan® & JUWAmid wheels

Non floor damaging
Non floor marking

Power

The skate runs on a rechargeable lithium-ion LiFePO4 battery. Charge time: 4-5 hours. The battery powers two 48V motors which propel the yellow JUWAthan drive wheels. The black JUWAmid wheels provide for load capacity.

Included accessories with EP15:

Skate battery charger
110V. 7.75 Amps.
UL Recognized.

Remote control (cordless)
Forward, reverse, stop, left/right (360°), speed.

Remote control charger
110V. 50/60HZ; 250mA.

JUNG

MADE IN GERMANY
By **JUNG**

5 Year Manufacturer’s Warranty
1 year on all electrical components
(damage due to overloading not covered)